


MFG-FD-DA-01 • v0.8 MANUFACTURING DRAWING


TOP X-Y



FRONT X-Z

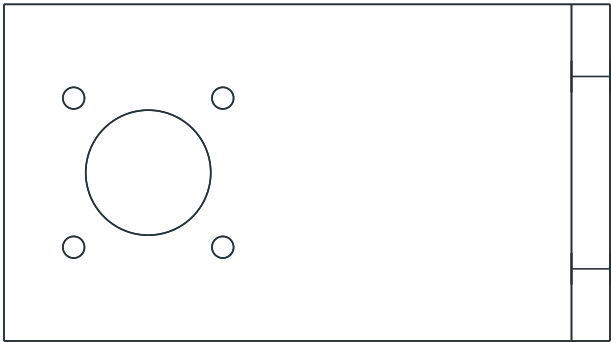

SIDE Y-Z

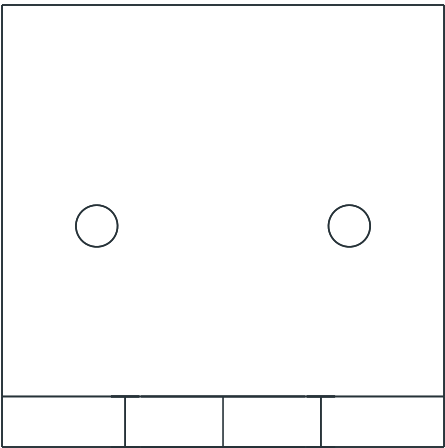

Drawing MFG-FD-DA-01 | Part FD-DA-01 — Feeder reference-drive frame mount | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit 5008ee78988e17bcd38904df27b48af28fd8c594

Material: S275 steel | Process/finish: laser/waterjet + bore finish + weld flange

Overall: X 126.000 × Y 70.000 × Z 70.000 mm | general tolerance ISO 2768-m unless noted

Critical: 126x70x70 welded shelf; gearbox pilot Ø26 clearance; 4xØ4.5 at31 mm square; 2xØ6.6 frame holes at40 pitch; mount centre30/35; weld continuous both sides; gearbox axis position0.10 to frame datum

GD&T/datums: A=material-flow axis; B=mounting face; C=drive/sensor centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; dry assembly rotation and cleanout/dead-pocket inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.