



MFG-FD-MET-01 • v0.8 MANUFACTURING DRAWING


TOP X-Y

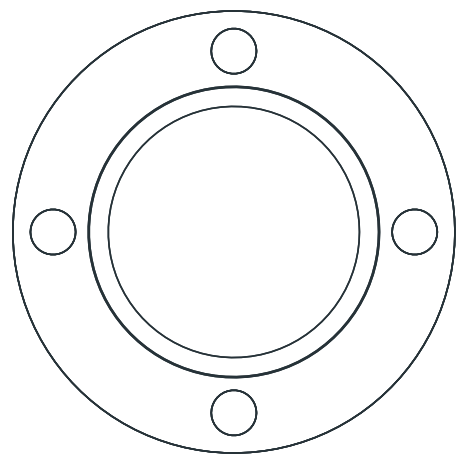

FRONT X-Z

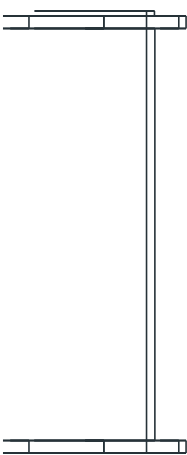

SIDE Y-Z

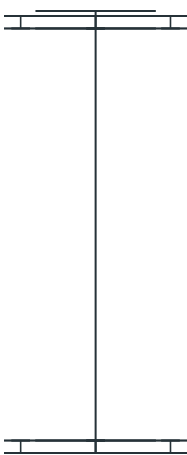

Drawing MFG-FD-MET-01 | Part FD-MET-01 — Metering auger housing | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit d09fe9bc0a587c2aadf27557c7d2bed8bf3f9424

Material: 304 stainless | Process/finish: turn tube/flanges + drill

Overall: X 44.000 × Y 44.000 × Z 106.200 mm | general tolerance ISO 2768-m unless noted

Critical: OD29/ID25.00 +0.05/0 x105 flange face plus upper spigot OD28.77–28.80 x1.20±0.05; flanges Ø44 x3; 4xØ4.60 +0.10/0 PCD36±0.05; auger radial clearance 0.20–0.25

GD&T/datums: A=material-flow axis; B=mounting face; C=drive/sensor centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; dry assembly rotation and cleanout/dead-pocket inspection

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.