



MFG-EX-DIE-01 · v0.8 MANUFACTURING DRAWING


TOP X-Y

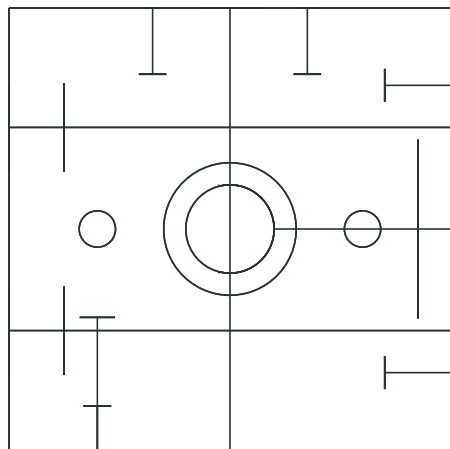

FRONT X-Z

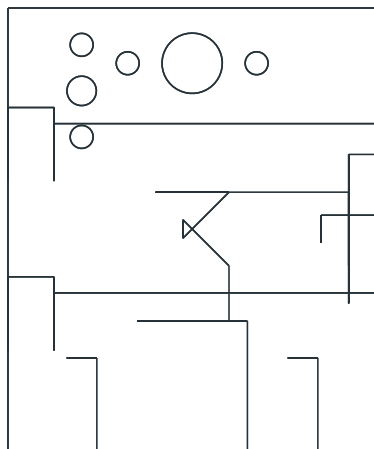

SIDE Y-Z

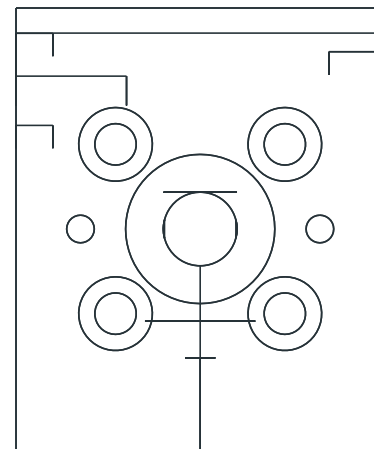

Drawing MFG-EX-DIE-01 | Part EX-DIE-01 — Connected 90 degree down-die body | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit d09fe9bc0a587c2aadf27557c7d2bed8bf3f9424

Material: SCM440 QT + gas nitride | Process/finish: 6-face mill; gun drill/ream intersecting Ø8 channels; counterbore, drill/tap; stress relieve; gas nitride; lap sealing face

Overall: X 40.000 × Y 40.000 × Z 48.000 mm | general tolerance ISO 2768-m unless noted

Critical: 40x40x48; barrel face X40; Ø8 melt turn; Ø16.20 +0.05/0 x3 breaker seat; Ø12.00 +0.03/0 x14 insert seat; 4xØ4.5 + Ø8 recess PCD26; 2xØ3 H7 depth6 PCD26 at0/180 deg, position Ø0.02 to melt axis, selected Ø3 m6 dowels; heater Ø6.55 H7 through; 2xM3-6H depth6 at14 mm pitch for heater flange; sensor Ø3.20 +0.05/0 blind12.00 +/-0.05; 2xM3-6H depth4 at10 mm pitch around sensor; face flatness0.03; deburr flow intersection; HOLD

GD&T/datums: A=barrel interface face; B=melt-channel axis; C=fastener-pattern centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; pin-gauge channels/orifice; face flatness; shielded hydro/hot-polymer containment test

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.