



MFG-EX-DIE-03 · v0.8 MANUFACTURING DRAWING


TOP X-Y

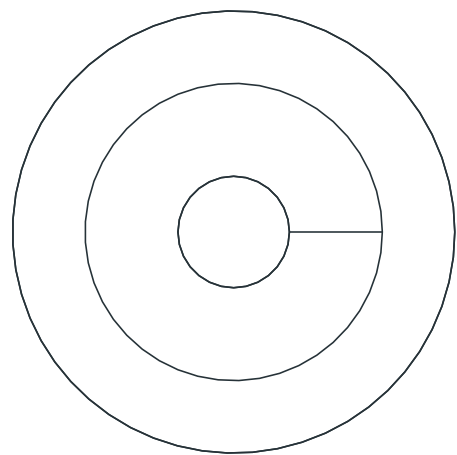

FRONT X-Z

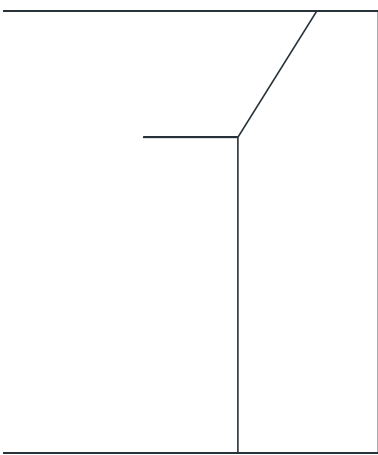

SIDE Y-Z

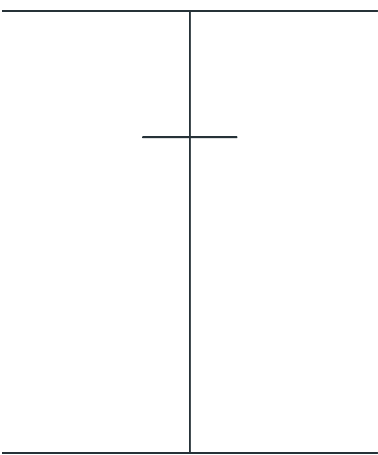

Drawing MFG-EX-DIE-03 | Part EX-DIE-03 — Replaceable Ø3 die insert | Qty 1

Rev final-design-fabrication-closure-v0.8 | Units mm | Scale NTS, dimensions govern | Third-angle projection | source commit b287f07f7a55ba61e39c0a5cbe8e45515c9e53ec

Material: 17-4PH H900 stainless | Process/finish: turn, drill/ream land, 60 degree included entrance blend, H900, finish lap

Overall: X 11.900 × Y 11.900 × Z 14.000 mm | general tolerance ISO 2768-m unless noted

Critical: OD Ø11.90 -0.02/0 x14.00 ±0.03; outlet Ø3.00 +0.02/0 x10.00 land; 4 mm transition from Ø8 to Ø3; land Ra<=0.4 um; concentricity 0.02 to OD

GD&T/datums: A=barrel interface face; B=melt-channel axis; C=fastener-pattern centre plane; verify datum marking on supplier inspection report

Inspection: CMM/caliper against STEP and drawing; deburr and visual crack/warp inspection; pin-gauge channels/orifice; face flatness; shielded hydro/hot-polymer containment test

Edges: remove burrs; break unspecified sharp edges C0.3–0.5. No unapproved material/tolerance substitution.

Artifact check: PASS only; fabrication HOLD pending full v0.8 gates. Physical NOT_RUN; machining USER_APPROVAL_REQUIRED.